

Mast height from waterline is 18.62m/61' 1"

Conventional pin head main is optional

Sail Plan Optimized by Randy Smyth

FF[®]
41

Sail	AREA
Mainsail	60sq.m. 646sq.ft
Jib	25sq.m 270sq.ft
Screacher	64.9sq.m 700sq.ft
Asym. Spinn.	148.2sq.m 1595sq.ft
<i>Optional if required:</i>	
Storm Jib	12.7sq.m 136sq.ft
Genoa	33.5sq.m 361sq.ft.


Mainsail, jib and screacher represent the best overall value for a minimum sail wardrobe. This combination of easily handled sails will give up to 90% of the maximum potential performance possible with a full set of sails.

Screacher is an effective substitute for the spinnaker downwind and can also be used to windward in light airs (replacing genoa).

Storm jib may not be necessary with a good furling/reefing jib.

Genoa is only essential for serious racing in the 9 to 12 knot wind speed range.

The flush squaretop main has now proven to be superior to all other conventional full batten mains on identical boats. It will give the same performance as a mast 5-7% higher but with less weight and windage aloft.

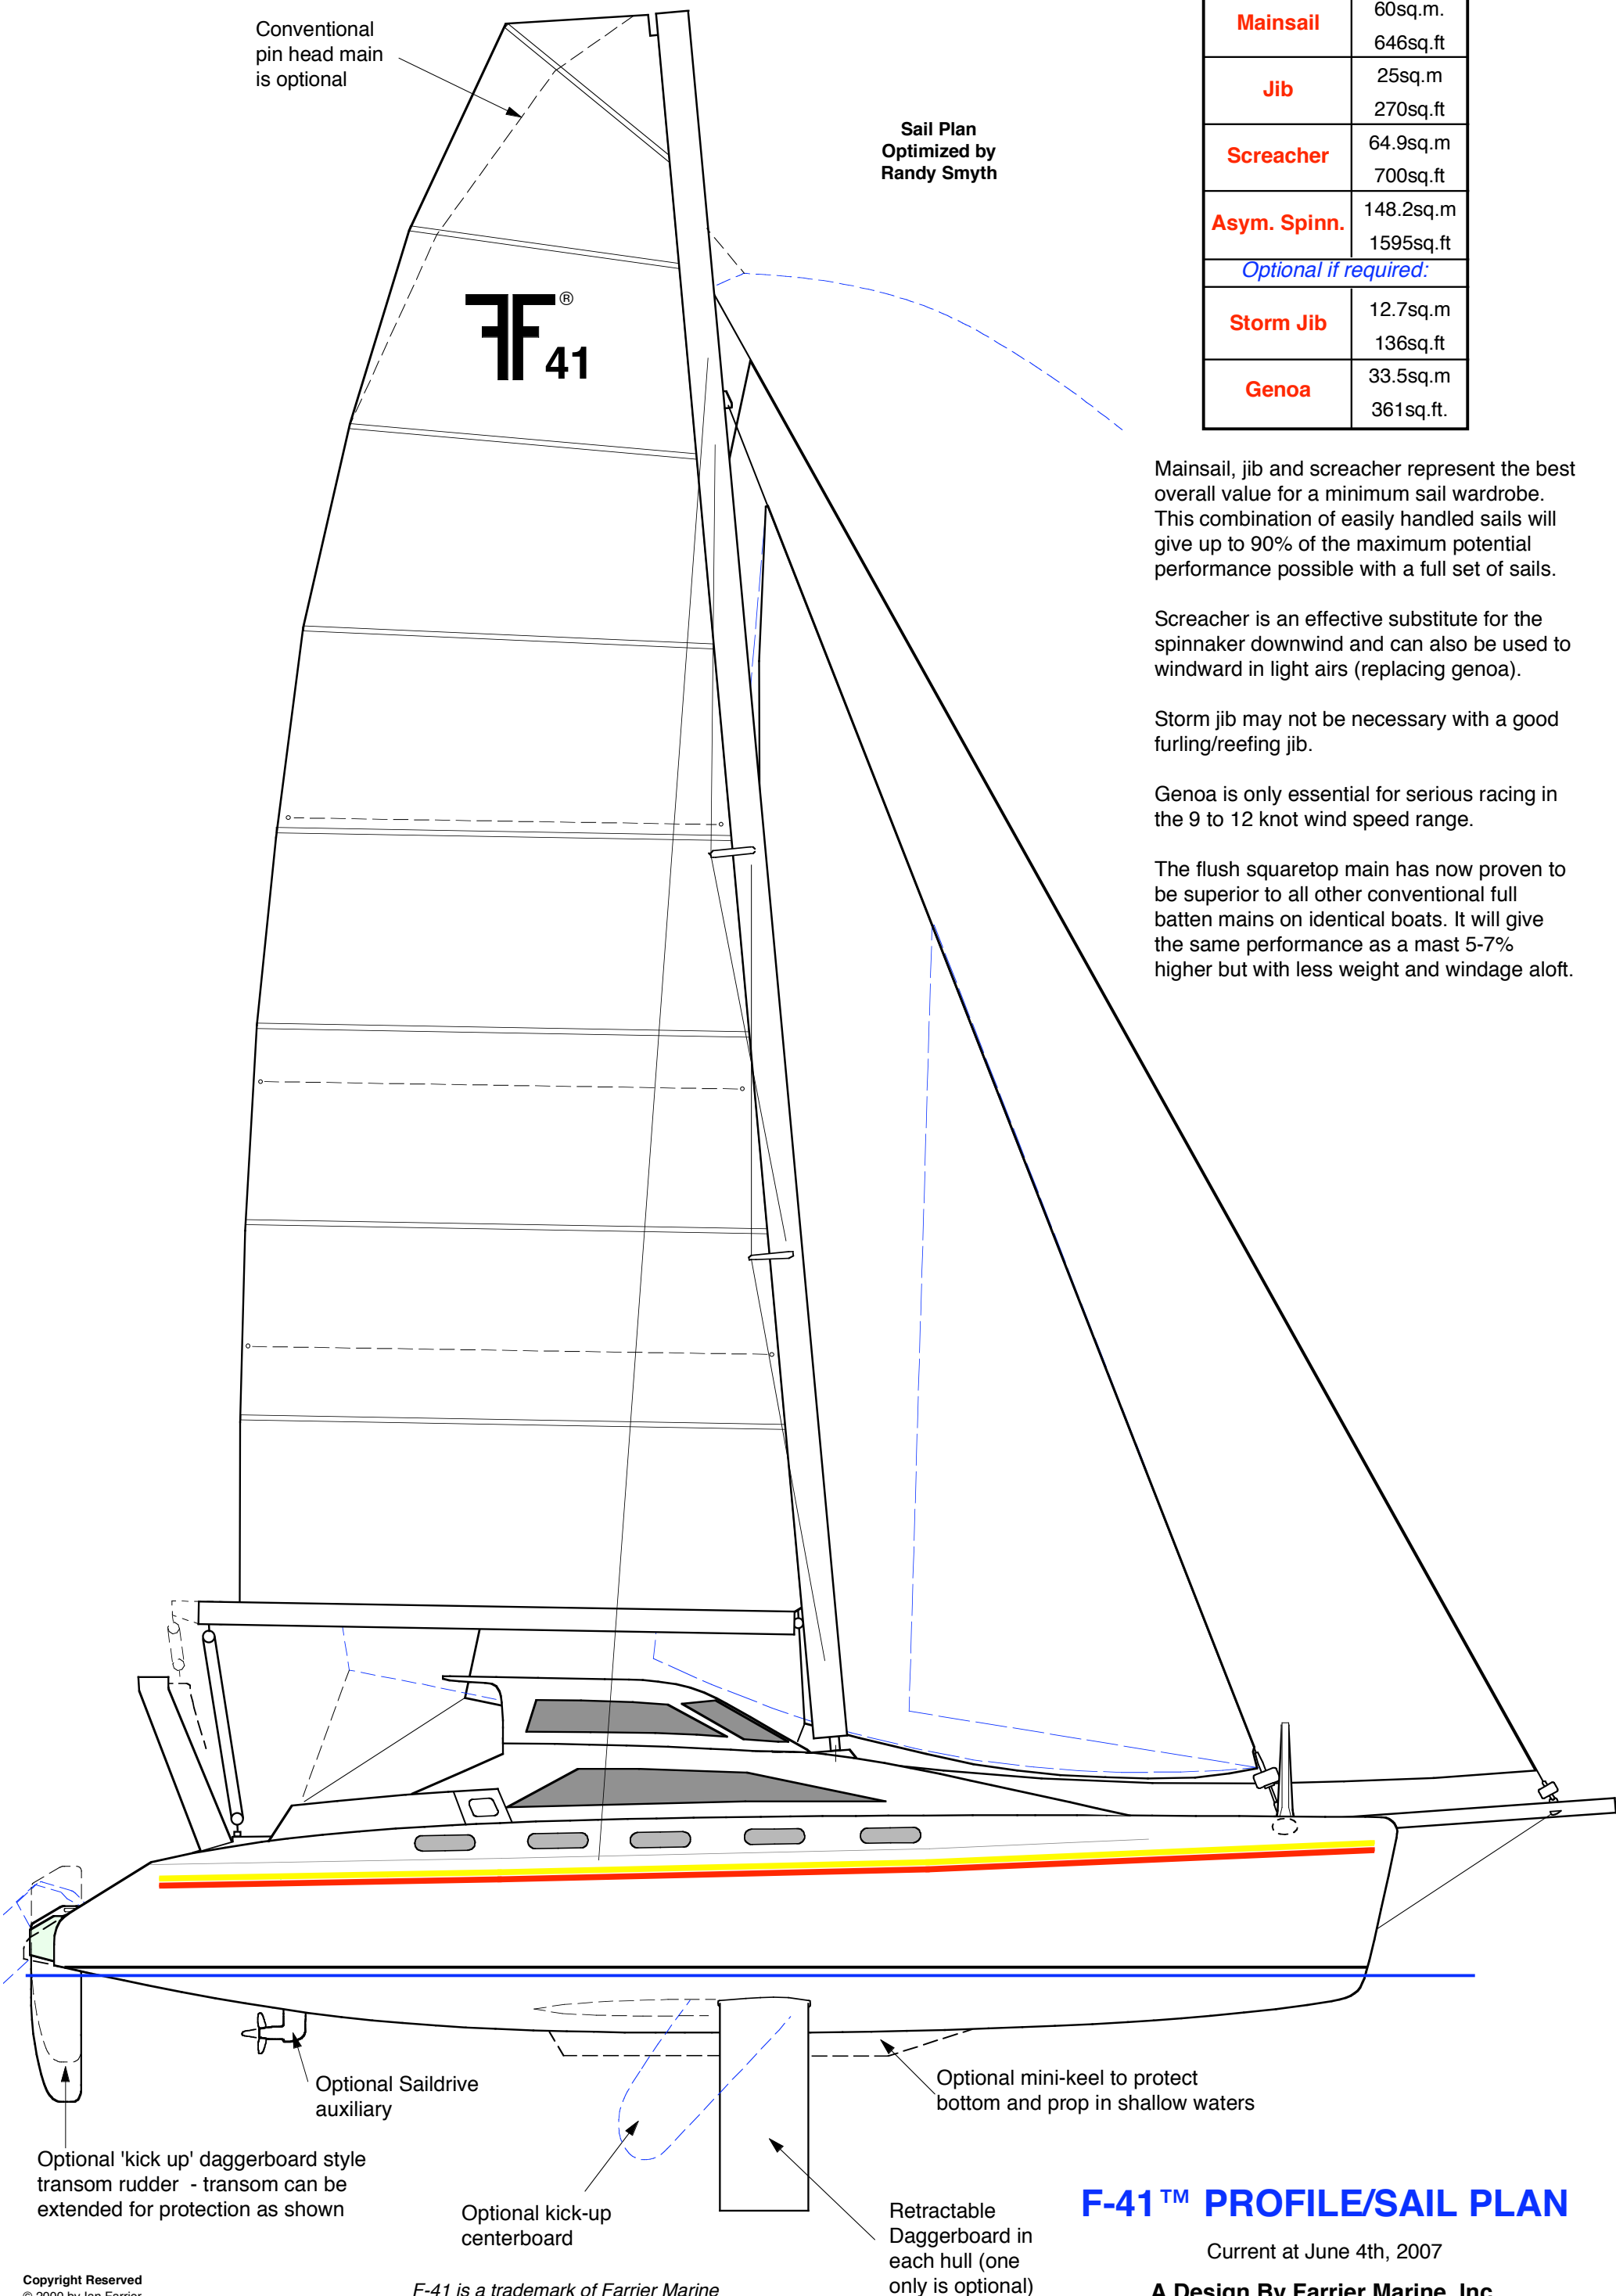

F-41™ PROFILE/SAIL PLAN

Current at June 4th, 2007

A Design By Farrier Marine, Inc.